


MCDONALD 74M
"A" SERIES CAST
IRON METER PIT
FRAME AND
COVER

FITTING HUB WITH 4"
THREADED PLUG.
APPLY TEFLON THREAD
TAPE, OR APPROVED
EQUAL, OVER
THREADS.

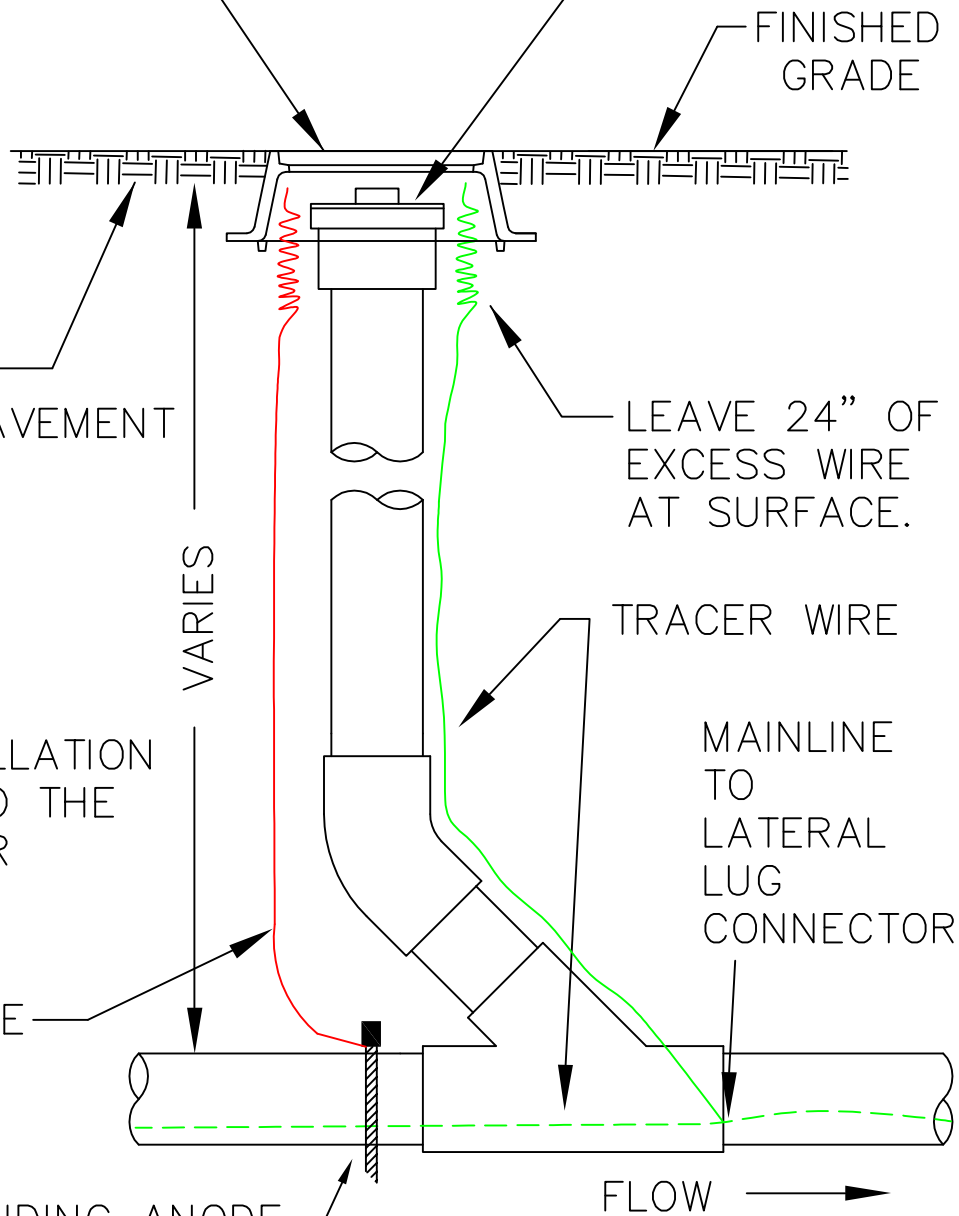

4" TOPSOIL
OR DRIVEWAY PAVEMENT

LEAVE 24" OF
EXCESS WIRE
AT SURFACE.

TRACER WIRE

MAINLINE
TO
LATERAL
LUG
CONNECTOR

GROUND WIRE

MAGNESIUM GROUNDING ANODE

FLOW →

NOTE:

FOR TRACER WIRE INSTALLATION
REQUIREMENTS, REFER TO THE
MINNESOTA RURAL WATER
ASSOCIATION STANDARD
DETAILS.

APPROVED JANUARY 1, 2018

CITY ENGINEER REG 23110

TYPICAL DRAINTILE
CLEANOUT ASSEMBLY

GV-ST-050